


# Product data sheet

Specifications

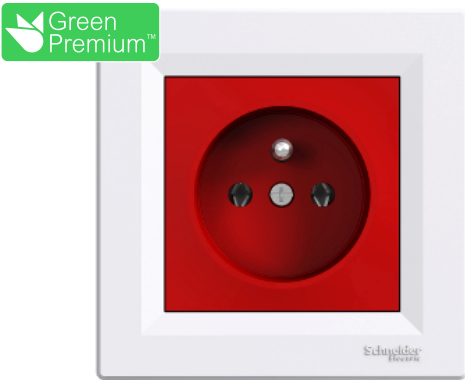

## Asfora - single socket outlet with pin earth - 16A white/red

EPH2800421

### Main

Range	Asfora
Product or component type	Socket-outlet
Outlet standard description	Pin earth
Outlet poles configuration	2P + E
Device presentation	Complete product
Colour tint	White and red
Type of packing	Flow-pack

### Complementary

Socket number	1
Device mounting	Flush
Power range	3680 W
Rated current	16 A at 250 V AC
Connections - terminals	Lift terminals
Number of cables	2 cable(s) 2.5 mm²
Cable stiffness	Flexible Rigid Solid stranded
Wire stripping length	13.0 mm
Material	ABS (acrylonitrile butadiene-styrene): cover frame ABS + PC: central plate
Surface finish	Glossy
Conductor material	Copper
Fixing mode	Screws or claws51...69 mm
Height	83 mm
Width	83 mm
Depth	42 mm
Projecting depth	10 mm
Quantity per set	1
Net weight	0.081 kg

Environment

Standards	IEC 60884-1
Product certifications	SEP-BBJ TSE
IP degree of protection	IP20

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	80.25 g
Package 1 Height	4 cm
Package 1 width	8 cm
Package 1 Length	8 cm
Unit Type of Package 2	BB1
Number of Units in Package 2	10
Package 2 Weight	889.0 g
Package 2 Height	9.5 cm
Package 2 width	18.5 cm
Package 2 Length	27.5 cm
Unit Type of Package 3	S04
Number of Units in Package 3	120
Package 3 Weight	11.252 kg
Package 3 Height	30 cm
Package 3 width	40 cm
Package 3 Length	60 cm

Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	<a href="#">REACH Declaration</a>
EU RoHS Directive	Compliant <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
China RoHS Regulation	<a href="#">China RoHS declaration</a> Product out of China RoHS scope. Substance declaration for your information
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins

Contractual warranty

Warranty	18 months
----------	-----------